

High-Performance Distance Sensors

P1PY107 LASER

Part Number

PNG // smart, der wintec.



- Analog output 0...10 V
- Intuitive operating concept
- No interactive influence
- Wide working range and precise detection thanks to DS technology

The sensors function in accordance with the principle of transit time measurement with laser class 1. The wintec with Dynamic Sensitivity technology (DS) enables previously unattainable reception sensitivity even with very weak signals. As a result, the sensors have a large working range of up to 10 m and can reliably detect dark or shiny objects even at extreme angles. wintec also works very reliably in adverse ambient conditions, e.g., caused by ambient light or dirt. Extensive condition monitoring functions additionally enable predictive maintenance and trouble-free operation.




Technical Data

Optical Data	
Working Range	0...10000 mm
Adjustable Range	50...10000 mm
Reproducibility maximum	3 mm*
Linearity Deviation	10 mm*
Light Source	Laser (red)
Wavelength	660 nm
Service Life (T = +25 °C)	100000 h
Laser Class (EN 60825-1)	1
Beam Divergence	< 2 mrad
Max. Ambient Light	100000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	18...30 V DC
Current Consumption (U _b = 24 V)	< 40 mA
Measuring Rate	100 /s *
Measuring Rate (max.)	500 /s *
Temperature Drift	< 0,4 mm/K
Temperature Range	-40...50 °C
Analog Output	0...10 V
Reverse Polarity and Overload Protection	yes
Short Circuit Protection	yes
Interface	IO-Link V1.1
Baud Rate	COM3
Protection Class	III
FDA Accession Number	2110079-000
Mechanical Data	
Setting Method	Teach-In
Housing Material	Plastic
Optic Cover	PMMA
Degree of Protection	IP67/IP68
Connection	M12 × 1; 4/5-pin
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	508,83 a
Error Output	●
Analog Output	●
IO-Link	●
Connection Diagram No.	241
Control Panel No.	A45
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	380


* Depends on mode, see table 2

Complementary Products


IO-Link Master
Software

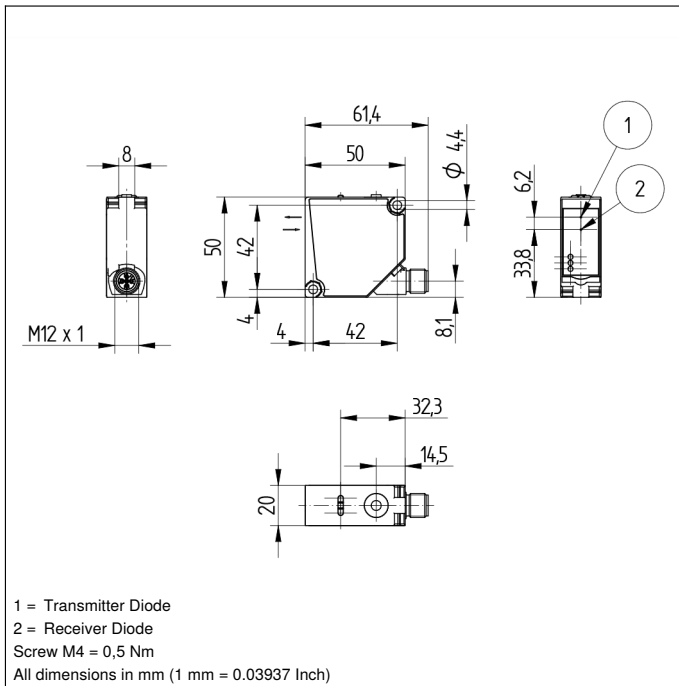

Ctrl. Panel



06 = Teach Button
 12 = Analog Output Indicator
 5a = Switching Status Display, O1
 68 = supply voltage indicator

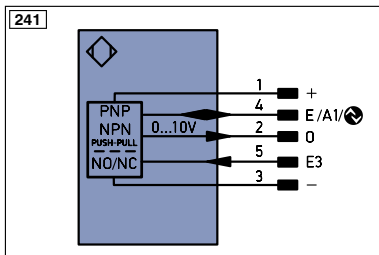

Legend			
+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ū	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Ṽ	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	AWV	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	S+	Emitter-Line
E/A	Output/Input programmable	⊕	Grounding
	IO-Link	SnR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
Bl_D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN0.6542	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contactur Monitoring
		EN1.6542	Encoder A/Ā (TTL)
		EN2.6542	Encoder B/B̄ (TTL)
		ENa	Encoder A
		ENb	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOk	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLt	Brightness output
		M	Maintenance
		rsv	reserved
			Wire Colors according to IEC 60757
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Table 1

Working Distance	0 m	5 m	10 m
Light Spot Diameter	5 mm	10 mm	15 mm

