

## Super Miniature Slip Ring LPMS 04-A

The LPMS-04A super miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. And the housing material is engineering plastic or metal. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections.



The LPMS-04A allows tremendous flexibility in dealing with system size restrictions. It is available in 1-4 circuit configurations.

### Specifications


Operating Speed	0-300 rpm
Number of Circuits	4
Voltage	240 VAC/DC
Current Rating	1 amps per circuit
Temperature Range	-20°C to +60°C
Contact Material	Gold to Gold
Lead Size	30# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩMin

### Capsule Length

# of Circuits	L (mm)	Part No
4	10.8	LPMS-04A

- ◆ The operating life of the unit depends upon temperature, rotation speed and environment.
- ◆ The operating life ≥50,000,000 runs ref.

## Features

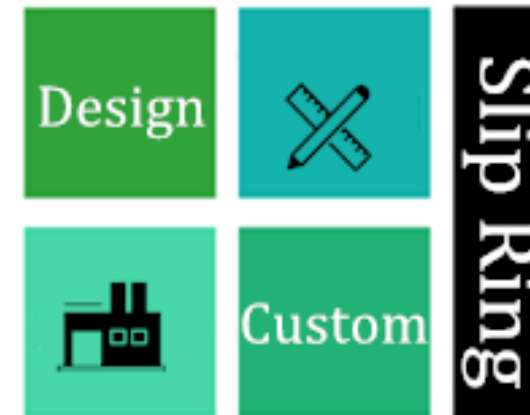

- ✓ 4 circuits models
- ✓ 1 amps per circuit , 240 VAC/VDC
- ✓ Precision assembly to provide exceptional rotational life
- ✓ Speed up to 300 rpm continuous
- ✓ Gold-Gold contacts ensure long life time
- ✓ Flexible, color-coded, silver-plated lead wires
- ✓ Superior handling of low level control signals
- ✓ Metal housing optional



TEMPERATURE RANGE  
-20° C to 60° C



MAXIMUM OPERATING SPEED  
0-300 RPM

## Applications

- ✓ Electrical test equipment
- ✓ Manufacturing and process control equipment
- ✓ Indexing tables
- ✓ CTV pan / tilt camera mounts
- ✓ Robotics, rotary sensors, urgent illumination equipmen
- ✓ Exhibit / display equipment/Closed-circuit control
- ✓ Min-type wire-rolling machine
- ✓ Closed-circuit control




## Advantage



- ✓ Low torque minimizes system torque budget
- ✓ External gold plated pins, Extremely easy to install
- ✓ Smooth running
- ✓ Low electrical noise
- ✓ Compact design to fit in the most demanding space
- ✓ 360°continuous rotation
- ✓ High bandwidth transfer capability
- ✓ Addition of special components
- ✓ Working speed would be up to 300rpm or higher
- ✓ Compact package

## Drawings

Model:LPMS-04A

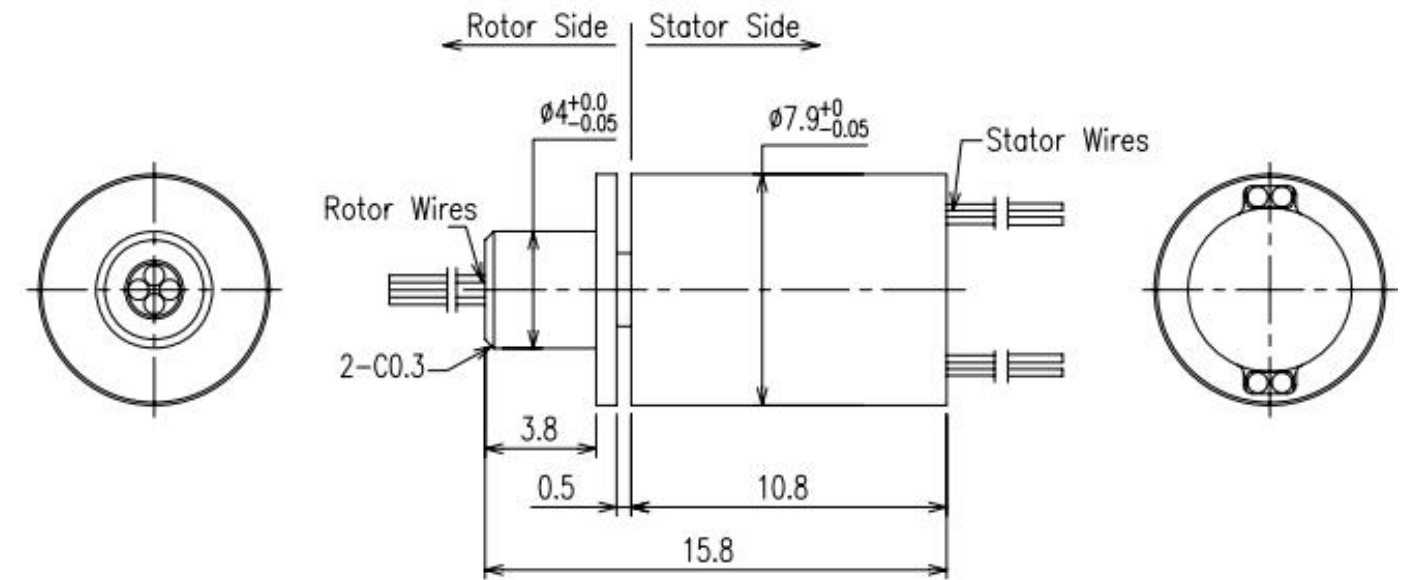

### MESSAGE

Any questions about slip ring, please leave your message to get a professional solution

Wire Color Code								
Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
AWG30# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN

Remarks: 1. AWG30# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

#### PRODUCT CATEGORY

FORJ  
Capsule slip ring  
Through bore slip ring  
Pancake slip ring  
Mercury slip ring  
Separate slip ring  
Miniature slip ring  
Wind turbine slip ring  
Hydraulic slip ring  
Pneumatic slip ring  
Coaxial rotary joints

#### REQUESTS

Circuits  
Current&voltage  
Signal details  
Dimension  
Working speed  
Working temperature  
Operating  
Environment  
Other

#### INDUSTRIES

Surveillance  
Crane  
Medical  
Marine  
Defence  
Radar antenna  
Automation  
Meter and instrument  
Wind turbine generator  
VR Device  
Other

Contact us on wire color codes



Send