

## Capsule Slip Ring LPC-30A

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure.

The LPC-30A capsule slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. Using a 90° V-groove ring design for each ring, the LPC-30A provides smoother running, lower torque and lower electrical noise than competitive slip rings. It is available in 6, 12, 18 circuit modes.



### Specifications

Operating Speed	0-300 rpm
Number of Circuits	30
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20°C to +60°C
Contact Material	Gold to Gold
Lead Size	28# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩ Min

### Capsule Length

# of Circuits	L (mm)	Part No
30	49.8	LPC-30A

- ◆ The operating life of the unit depends upon temperature, rotation speed and environment.
- ◆ The operating life ≥50,000,000 runs ref.

## Features



- ✓ 30 circuits models,
- ✓ 2 amps per circuit ,240VAC/DC
- ✓ Speed up to 300 rpm continuous
- ✓ Gold-gold contacts
- ✓ Compatible with data bus protocols
- ✓ Sealed units are also available
- ✓ Flexible, color-coded, silver-plated, insulated lead wires
- ✓ Transfer analog and digital signals
- ✓ Also available with 5 and 10 amps power rings combined with 2 amps rings.
- ✓ Precision ball bearings meet or exceed life requirements for most commercial applications

## Applications

- ✓ Electrical test equipment
- ✓ Manufacturing and process control equipment
- ✓ Indexing tables
- ✓ CCTV pan / tilt camera mounts
- ✓ Robotics, rotary sensors, urgent illumination equipment
- ✓ Exhibit / display equipment/Closed-circuit control
- ✓ Aviation ,military ,instrument, medical equipment.
- ✓ Min-type wire-rolling machine / Wind turbine generator





**TEMPERATURE RANGE**  
-20° C to 60° C



**MAXIMUM OPERATING SPEED**  
0-300 RPM


## Advantage



- ✓ Low torque minimize system torque budget
- ✓ Compact design to fit in the most demanding space.
- ✓ Smooth running
- ✓ Low electrical noise
- ✓ Quick shipment per your urgent requirement
- ✓ 360 continuous rotation
- ✓ High bandwidth transfer capability
- ✓ Addition of special components
- ✓ Quick shipment

## Drawings

Model:LPC-30A

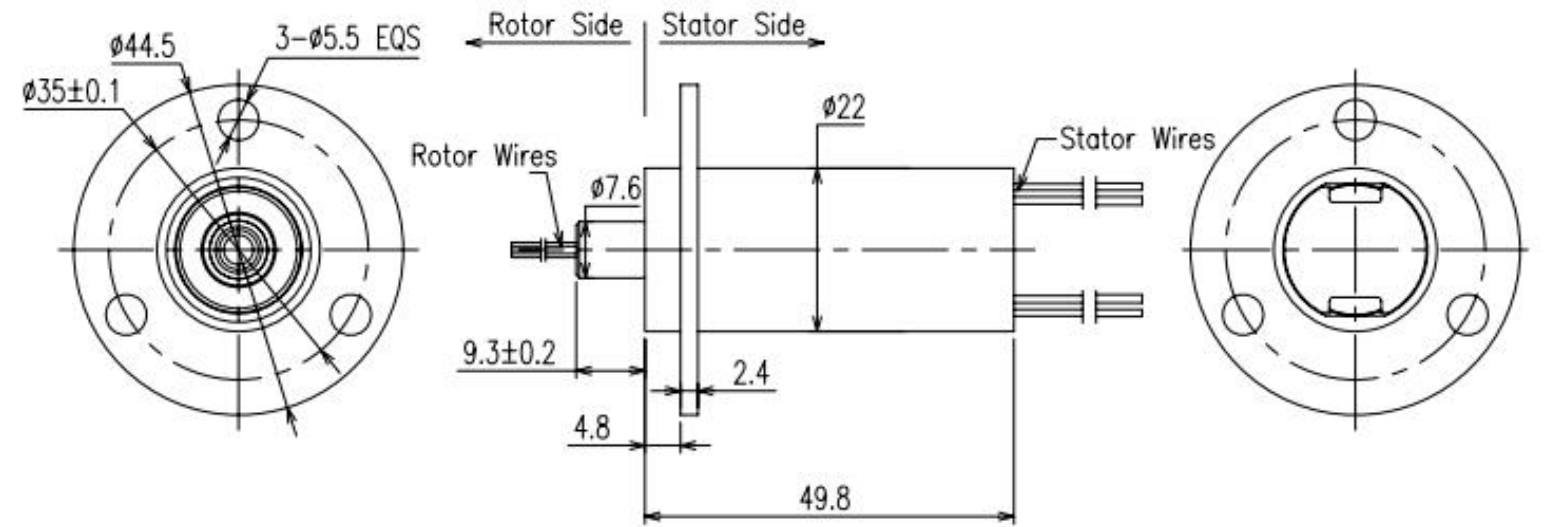

## MESSAGE

Any questions about slip ring, please leave your message to get a professional solution

Wire Color Code								
Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle  
2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

### PRODUCT CATEGORY

FORJ  
Capsule slip ring  
Through bore slip ring  
Pancake slip ring  
Mercury slip ring  
Separate slip ring  
Miniature slip ring  
Wind turbine slip ring  
Hydraulic slip ring  
Pneumatic slip ring  
Coaxial rotary joints

### REQUESTS

Circuits  
Current&voltage  
Signal details  
Dimension  
Working speed  
Working temperature  
Operating  
Environment  
Other

### INDUSTRIES

Surveillance  
Crane  
Medical  
Marine  
Defence  
Radar antenna  
Automation  
Meter and instrument  
Wind turbine generator  
VR Device  
Other



Send